

## L-INX Automation Server

# LINX-202, LINX-203

Datasheet #89035501

✓ BACnet


CEA-709

✓ KNX

✓ Modbus

✓ M-Bus

✓ OPC

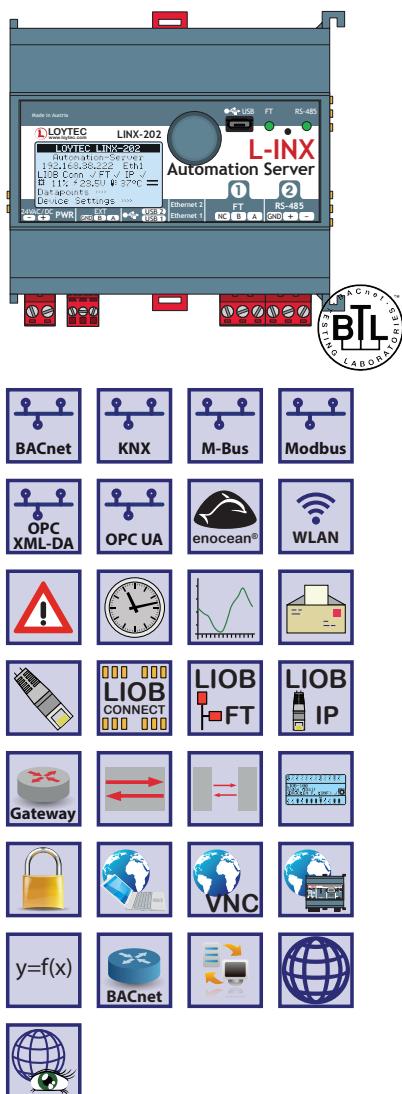

The L-INX Automation Servers LINX-202 and LINX-203 (successors of LINX-200, LINX-201) can host user specific graphical pages for the visualization of information from BACnet networks via LWEB-900 (Building Management) or LWEB-802/803. They can integrate physical I/Os through L-IOB I/O Modules via LIOB-Connect, LIOB-FT, or LIOB-IP. Local operation and override is provided by the built-in jog dial and the backlit display (128x64 pixels). Device and data point information is shown on the display via symbols and in text format.

BACnet can be integrated via BACnet/IP or BACnet MS/TP. In addition, the Automation Servers provide connectivity to concurrently integrate KNX, Modbus, and M-Bus and connect as a gateway data points of different technological origin. Optionally, mathematical objects can be applied within a connection to calculate the data point output values depending on the formula used. Depending on the type, the Automaton Servers feature a BACnet/IP router including BBMD as well as Slave-Proxy functionality (LINX-203). LINX-202 and LINX-203 are BTL certified as B-BC (BACnet Building Controller).

The gateway functionality allows data communication between all communication technologies available on the device. Different technology data points are mapped through Local Connections on the device. The mapping of different technology data points on distributed devices is supported by Global Connections. L-INX Automation Servers also support Smart Auto-Connect™ – the automatic generation of connections to substantially reduce engineering efforts and cost. All technology data points are automatically created as OPC XML-DA and OPC UA data points.

Each L-INX Automation Server is equipped with two Ethernet ports. It can either be configured to use the internal switch to interconnect the two ports or every port is configured to work in a separate IP network.

When the Ethernet ports are configured for two separate IP networks, one port can be connected for instance to a WAN (Wide Area Network) with enabled network security (HTTPS) while the second port can be configured to be connected to an insecure network (LAN) where the standard building automation protocols like BACnet/IP, LON/IP, or Modbus TCP are present. These devices also feature firewall functionality of course to isolate particular protocols or services between the ports.

Using the internal switch, a daisy chained line topology of up to 20 devices can be built, which reduces costs for network installation. The IP switch also allows the setup of a redundant Ethernet installation (ring topology), which increases reliability. The redundant Ethernet topology is enabled by the Rapid Spanning Tree Protocol (RSTP), which is supported by most managed switches.

The L-INX devices provide fully featured AST™ functionality (Alarming, Scheduling, and Trending) and can be integrated perfectly into the L-WEB System.

## Features

- Visualization of customized graphical pages through LWEB-900 (Building Management), LWEB-803 (Monitoring and Control), or LWEB-802 (Web Browser)
- Stores customized graphical pages
- Extension with physical inputs and outputs using L-IOB I/O Modules (LIOB-Connect, LIOB-FT, or LIOB-BIP)
- 128x64 graphic display with backlight
- Local and remote access to information about device status and data points
- Manual operation using the jog dial or VNC client
- Alarming, Scheduling, and Trending (AST™)
- Event-driven e-mail notification
- Math objects to execute mathematical operations on data points
- Integrated OPC XML-DA and OPC UA server
- Dual switched or separated Ethernet ports
- Access to network statistics
- Compliant with ANSI/ASHRAE 135-2012 and ISO 16484-5:2012 standard
- Supports BACnet MS/TP or BACnet/IP
- BACnet Client Function (Write Property, Read Property, COV Subscription)

- BACnet Client Configuration with configuration tool (scan and EDE import)
- B-BC (BACnet Building Controller) functionality, BTL certified
- Integrated BACnet/IP to BACnet MS/TP Router including BBMD as well as Slave-Proxy functionality (LINX-203 only)
- KNXnet/IP, connection to KNX TP1 through LKNX-300 Interface
- M-Bus Master according to EN 13757-3, connection via optional M-Bus Converter (L-MBUS20 or L-MBUS80)
- Modbus TCP and Modbus RTU (Master or Slave)
- Gateway functions including Smart Auto-Connect™
- Integrated web server for device configuration and monitoring data points
- Configurable via Ethernet/IP
- Connection to EnOcean wireless devices via LENO-80x Interface
- Supports WLAN through LWLAN-800 Interface
- Stores user-defined project documentation

## Specifications

|                      |   |   |
|----------------------|---|---|
| Dimensions (mm)      | 107 x 100 x 75 (L x W x H), DIM044  |   |
| Installation         | DIN rail mounting following DIN 43880, top hat rail EN 50022  |   |
| Power supply         | 24 VDC / 24 VAC ±10 %, typ. 2.5 W   |   |
| Operating conditions | 0 °C to 50 °C, 10 – 90 % RH @ 50 °C, non condensing, degree of protection: IP40, IP20 (terminals)   |   |
| Interfaces           | 2 x Ethernet (100Base-T):<br>OPC XML-DA, OPC UA,<br>BACnet/IP*,<br>LIOB-IP,<br>KNXnet/IP,<br>Modbus TCP (Master or Slave),<br>HTTP, FTP, SSH, HTTPS, Firewall<br>1 x LIOB-Connect<br>1 x LIOB-FT<br>1 x RS-485 (ANSI TIA/EIA-485):<br>BACnet MS/TP*<br>or<br>Modbus RTU (Master or Slave) | 1 x EXT:<br>M-Bus, Master EN 13757-3<br>(needs L-MBUS20 or L-MBUS80)<br>or<br>KNX TP1 (needs LKNX-300)<br>2 x USB-A:<br>WLAN (needs LWLAN-800),<br>EnOcean (needs LENO-80x) |
| L-IOB I/O Modules    | Up to 8 L-IOB I/O Modules in any combination of type LIOB-Connect, LIOB-FT and LIOB-BIP   |   |
| BACnet/IP Router     | 1 (LINX-203 only)   |   |
| Tools                | L-INX Configurator  |   |

## Resource limits

|                                |                                   |                              |                     |
|--------------------------------|-----------------------------------|------------------------------|---------------------|
| Total number of data points    | 10 000                            | Alarm logs                   | 10                  |
| OPC data points                | 2 000                             | M-Bus data points            | 1 000               |
| BACnet objects                 | 750 (analog, binary, multi-state) | Modbus data points           | 2 000               |
| BACnet client mappings         | 750                               | KNX TP1 data points          | 250                 |
| BACnet calendar objects        | 25                                | KNXnet/IP data points        | 250                 |
| BACnet scheduler objects       | 100 (64 data points per object)   | Connections (Local / Global) | 1 000 / 250         |
| BACnet notification classes    | 32                                | Number of L-WEB clients      | 32 (simultaneously) |
| Trend logs (BACnet or generic) | 256 (4 000 000 entries, ≈ 6 MB)   | L-IOB I/O Modules            | 8                   |
| Total trended data points      | 256                               | Number of EnOcean devices    | 25                  |
| E-mail templates               | 100                               | EnOcean data points          | 250                 |
| Math objects                   | 100                               |                              |                     |

## L-INX Automation Server

# LINX-202, LINX-203

| Order number | Product description  |
|--------------|--|
| LINX-202     | BACnet Automation Server with LIOB-Connect, B-BC   |
| LINX-203     | BACnet Automation Server with LIOB-Connect, B-BC, and built-in BACnet/IP to MS/TP Router |
| LIOB-A2      | L-IOB Adapter 2 to split the LIOB-Connect bus using 4-wire cables                        |
| LIOB-A4      | L-IOB Adapter 4 to split the LIOB-Connect bus using RJ45 network cables                  |
| LIOB-A5      | L-IOB Adapter 5 to terminate the LIOB-Connect bus  |
| LIOB-100     | LIOB-Connect I/O Module: 8 UI, 2 DI, 2 AO, 9 DO (5 x Relay 6 A, 4 x Triac 1 A)           |
| LIOB-101     | LIOB-Connect I/O Module: 8 UI, 16 DI   |
| LIOB-102     | LIOB-Connect I/O Module: 6 UI, 6 AO, 8 DO (8 x Relay 6 A)                                |
| LIOB-103     | LIOB-Connect I/O Module: 6 UI, 6 AO, 5 DO (5 x Relay 16 A)                               |
| LIOB-150     | LIOB-FT I/O Module: 8 UI, 2 DI, 2 AO, 8 DO (4 x Relay 6 A, 4 x Triac 1 A)                |
| LIOB-151     | LIOB-FT I/O Module: 8 UI, 12 DI  |
| LIOB-152     | LIOB-FT I/O Module: 6 UI, 6 AO, 8 DO (8 x Relay 6 A)                                     |
| LIOB-153     | LIOB-FT I/O Module: 6 UI, 6 AO, 5 DO (4 x Relay 16 A, 1 x Relay 6 A)                     |
| LIOB-154     | LIOB-FT I/O Module: 7 UI, 4 AO, 7 DO (5 x Relay 6 A, 2 x Triac 1 A), 1 Pressure Sensor   |
| LIOB-550     | LIOB-BIP I/O Module: 8 UI, 2 DI, 2 AO, 8 DO (4 x Relay 6 A, 4 x Triac 1 A)               |
| LIOB-551     | LIOB-BIP I/O Module: 8 UI, 12 DI   |
| LIOB-552     | LIOB-BIP I/O Module: 6 UI, 6 AO, 8 DO (8 x Relay 6 A)                                    |
| LIOB-553     | LIOB-BIP I/O Module: 6 UI, 6 AO, 5 DO (4 x Relay 16 A, 1 x Relay 6 A)                    |
| LIOB-554     | LIOB-BIP I/O Module: 7 UI, 4 AO, 7 DO (5 x Relay 6 A, 2 x Triac 1 A), 1 Pressure Sensor  |
| LPOW-2415A   | LIOB-Connect power supply unit, 24 VDC, 15 W   |
| LPOW-2415B   | Power supply unit with power connector 24 VDC, 15 W                                      |
| L-MBUS20     | M-Bus level converter for 20 M-Bus devices   |
| L-MBUS80     | M-Bus level converter for 80 M-Bus devices   |
| LKNX-300     | KNX interface to connect KNX TP1 devices   |
| LENO-800     | EnOcean Interface 868 MHz Europe   |
| LENO-801     | EnOcean Interface 902 MHz USA/Canada   |
| LENO-802     | EnOcean Interface 928 MHz Japan  |
| LWLAN-800    | Wireless LAN Interface IEEE 802.11bgn  |